

APOLLO



Practical hooks for hanging towels and bathrobes



Hidden air valve




APOLLO AP1B- black coated finish
500 x 1140mm



APOLLO AP2C- chrome
500 x 1500 mm

APOLLO

Location of "attachment" to the wall: ↓ 80 mm ↑ 80 mm
Central heating: YES
Combination heating: YES
Electric heating: YES



Connection 50 mm
Central and Combination heating



Thermostatic valve
INTER, COMBI
Apollo, standard version
= COMBI-L, INTER-L
Apollo, left version
= COMBI-R, INTER-R


Connection 50 mm
Central heating




Thermostatic valve
ONE, UNIKO
Apollo, standard version
= ONE-L, UNIKO-L
Apollo, left version
= ONE-R, UNIKO-R



Thermostatic valve TWIN-COM

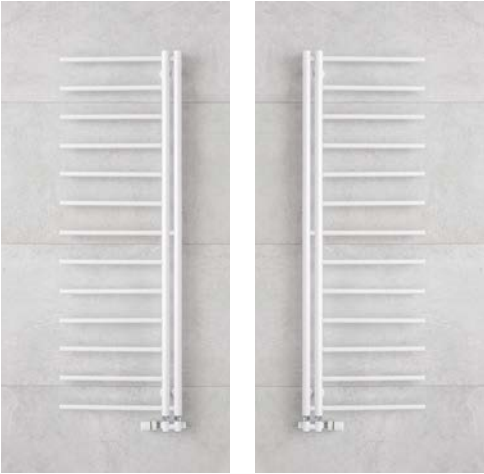

atypical version, - left, AP2W-L
standard version, AP2W

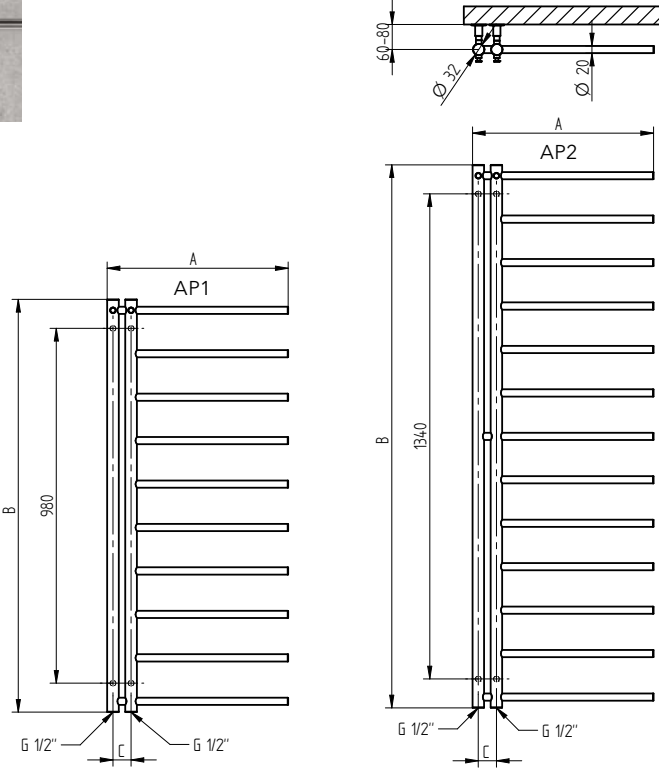

Chrome	Brushed stainless steel	Other surface finish (coated)*	Width (A) x Height (B) [mm]	Connection span (C) [mm]	HO [W] Δt 20°C 75/65°C			Max. recommended electric heating element [W]		
					Chrome	Stainless steel	Coated	Chrome	Stainless steel	Coated
AP1C	AP1SS	AP1	500 × 1140	50	168	200	266	150	200	200
AP2C	AP2SS	AP2	500 × 1500	50	219	261	346	200	200	300
AP1C-L	AP1SS-L	AP1-L	500 × 1140	50	168	200	266	150	200	200
AP2C-L	AP2SS-L	AP2-L	500 × 1500	50	219	261	346	200	200	300

*Other surface finishes see page 79.